

## RD Series Remote LED Displays

3 1/2 digit LED  
Choose Red, green, or blue  
Adjustable zero and span



### DESCRIPTION

This is a really attractive, super bright LED display for your control applications. Available in single or dual versions, it's low profile and rugged. You also get pre-cut vinyl labeling for humidity, temperature, and pressure. Adjustable zero/span.

### APPLICATIONS

- Provides users with valuable visual verification of humidity and/or
- temperature status
- Process control feedback, including pharmaceutical, food, and coating applications



Single Version Available



Dual and Triple Versions Available




Buy American Act Compliant


### FEATURES

- Fits standard single or double gang boxes (depending on version)
- Accepts 0-10V input signal
- Pre-cut vinyl labels provided with temperature, pressure, humidity for each display ordered.
- Factory scaled; user adjustable zero and span

### ORDERING

DIMENSIONS

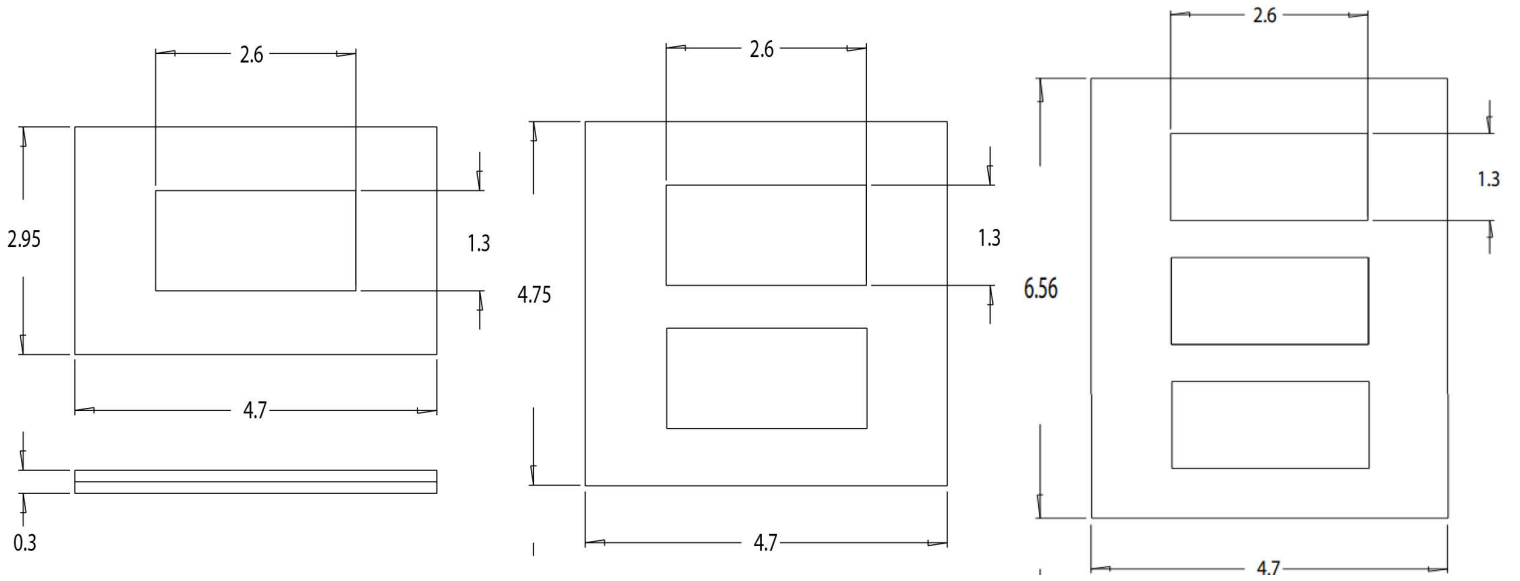

 **Warning:** The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

**SPECIFICATIONS**

Power supply	12-30VDC/24VAC (1), 40mA max. (per display)
Signal input range	0-10VDC
Scaling	Factory set for customer application Field adjustable zero and span
Display type	3-1/2 digit LED; Red, Green, or Blue
Accuracy	+/-1% F.S. +/- 2 counts
Sampling Rate	3 / second
Input Impedance	100k ohm
Operating Temperature	32-122oF (0-50oC)

1. One side of transformer, secondary is connected to signal common. Dedicated transformer is recommended.

*\* Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.*